
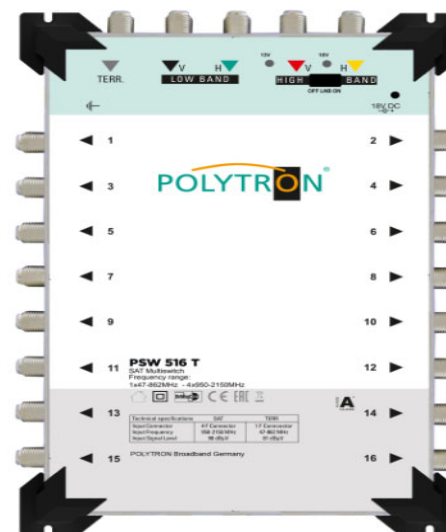


PSW 5 SERIES STANDALONE MULTISWITCHES

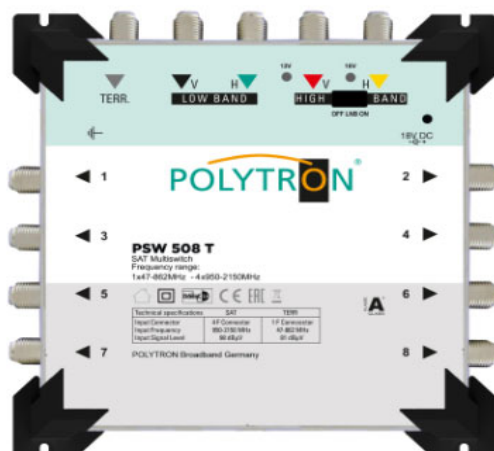

PSW 5 SERIES STANDALONE MULTISWITCH

Multiswitch			5/08	5/12	5/16	5/24	5/32
Inputs			4 SAT + 1 TERR				
Subscriber Outputs			8	12	16	24	32
Frequency	TERR	MHz	47 – 870				
Range	SAT		950 - 2150				
Subscriber Insertion gain	TERR	dB	-3 ± 2	-5 ± 2	-5 ± 2	-5 ± 2	-5 ± 2
	SAT		4 ± 2	3 ± 2	2 ± 2	2 ± 2	1 ± 2
Isolation	SAT-SAT	dB	>34	>34	>34	>34	>33
	SAT-TERR		>40	>38	>38	>37	>37
	OUT-OUT		>35	>35	>35	>35	>35
Max. output level (Subscriber)		dBμV	85				
TERR			92				
SAT							
Sat. and polarity selection			DiSEqC 2.0 / 13-18 Vdc 0-22 KHz				
Max. current consumption (without LNB)		mA	150			300	
Operating temp. range		°C	-10 to 40				
Packing dimensions		mm	120x130x 45	150x130x 45	180x130x4 5	266x130x 45	310x130x 45
Weight		Gr	0,32	0,37	0,44	0,63	0,70