

Receiver powered multiswitch, 5 inputs

Type: PSC 508 T

Stand-alone multiswitch, 5 inputs, 8 subscribers

The multiswitch **PSC 508 T** distributes the signals of your satellite system to up to 8 subscribers, such as SAT receivers, TV sets with satellite tuner, etc.

The terrestrial input for using with a DVB-T / FM antenna is broadband and LAN over Coax capable.

The PSC 508 T needs no power supply unit.

The multiswitch and the connected Quattro LNB are powered by the receiver!


- ▶ no loss at SAT-range
- ▶ high modulation / high signal-quality
- ▶ low power consumption
- ▶ short-circuit proof
- ▶ made in Germany



German magazine SATVISION marks PSC 508 T with grade A and "best value for money"!

NEW

Receiver powered!

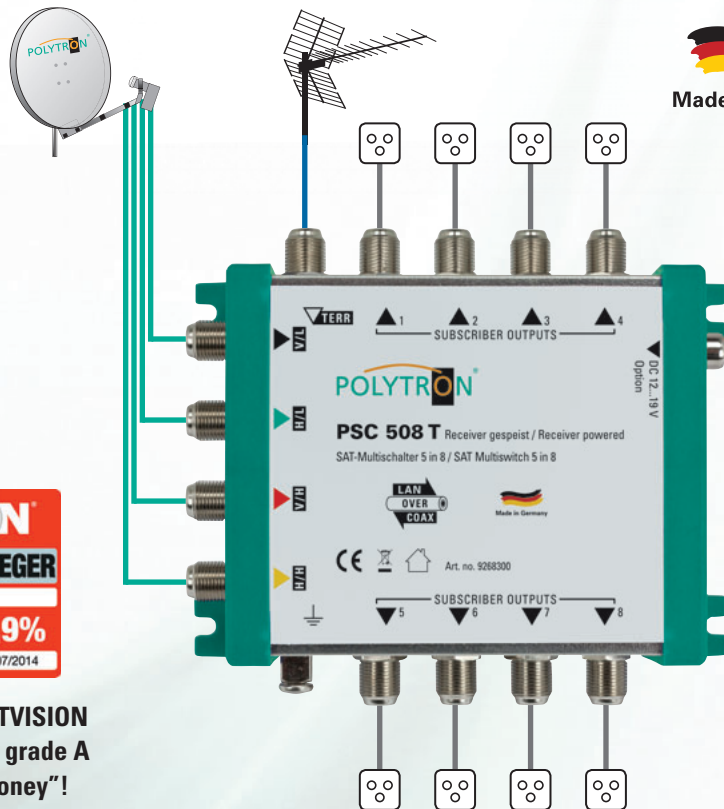


Made in Germany

Technical data

Type	PSC 508 T	
Article no.	9268300	
Inputs	4 SAT, 1 TERR	
Outputs	8	
Insertion loss	SAT 950-2200 MHz	-1...+3 dB
Insertion loss	Terr. 5-860 MHz	17 dB
Switching commands	14 V / 18 V / 0/22 kHz	
Isolation	Horz. / Vert.	> 30 dB
Isolation	SAT / Ter.	> 25 dB
Input level max.	SAT: 95 dB μ V ; TERR: 95 dB μ V	
Power consumption per receiver	35 mA	
LNB supply	powered by receiver	
Operation temperature	-30...+50 °C	
Operating voltage	powered by receiver	
Dimensions (W x H x D)	125 x 112 x 53 mm	

All data without guarantee. Subject to change. Errors excepted.